

SmartVent[™] #80750 Eave Edge Installation Instructions

(Do not install on less than 4/12 pitched roof.)

STEP 1: Cut a slit 1" wide (or a series of 1 3/4" holes at 3" STEP 2: Place the fabric piece half way on the roof rake on center) into the roof decking 6" to 7" up from the drip side edge and even along the drip edge. (Fabric sheets included in each box) edge. SmartVent[™] is rated 9NFA. • Half of the fabric should hang over the rake side edge of • Ensure drip edge has been installed. • Do not cut slit within 12" of any side or valley/wall the roof. intersection. or any other obstruction. • Nail the fabric in place with 2 roofing nails, one high and • Do not cut into the rafters. one low. Ensure insulation or other obstructions are not blocking • SmartVent[™] Tapered End-Caps (sold separately) are the flow of air extending from the cut slit to the roof's available for terminating an installation prior to an ridge, or other exhaust obstruction such as a wall, devices. (Use of SmartBaflle chimney, hip, valley or pipe. is recommended) Properly sized ridge or offridge exhaust vents are required. (SmartRidge II is recommended) Fascia Boar STEP 3: Lay the 3' piece of SmartVent[™] even with the **STEP 4:** Continue installing SmartVent[™] until the last piece. drip edge and at the roof rake drip edges. Starting 2" from each end of the SmartVent[™] piece, nail Repeat steps 2 and 3 before laying the final SmartVent[™] the SmartVent[™] to the roof decking at the top edge piece on the other end of the roof. • SmartVent[™] should align flush with rake fascia on all with 4 nails spaced evenly. • Nail the bottom with four nails matching the spacing from gable sides & wrapped with enclosed fabric as shown. the top row of nails along the nail line. • 36" wide ice & water membrane gets installed as the next step over the SmartVent[™] and against the upper wood • Each section requires a total of 8 nails (nails should be a minimum of 1 1/2", enough to penetrate through the roof roof deck. decking). • Wrap the end fabric tightly so it covers the outer edge of SmartVent the SmartVent[™] and nail it in place using two nails, one high and one low. STEP 5: Install ice and water membrane on top of the **STEP 6:** Shingle the roof as usual. SmartVent[™]. • Full width ice & water membrane (36") is required • Beginning with starter course, shingles must overhang to be installed over the SmartVent[™] in all SmartVent[™] by at least ½" and no more than 1". • Never install shingles flush with fabric edge on the eaves environments. Install ice & water membrane flush with lift edge of SmartVent[™] and flush on rake edges. or rake edge. Overhang shingle on rake edges by 1/2" or • Ensure the upper underlayments are lapped over the more. lower underlayments/ice & water membrane at all areas of the roof. 1/2" to 1" overhangat the eaves edge



SmartVent[™] Tapered End Cap #80751 Installation Instructions



(Do Not Use End Caps on Gable/Rake Edges of the Roof — Use Fabric Squares) For Installation at the eave's edge near a wall or obstacle to create a sloped shingle transition to zero lift-up at the wall flashing. Note: When using the SmartVent[™] Tapered End Cap on a mid-roof application, leave about an 18" space between hips and valleys so not to interfere with the flashing or cap shingles installation. Smart-Vent[™] Tapered End Caps are universal for right or left installations.

Step 1: Ensure the 1" roof cutout was completed to 12" before the end of the run and the metal drip edge was previously installed. Nail the SmartVent[™] Tapered End Cap as shown with the bottom edge flush with the drip edge. Leave about 3" to 6" of roof deck showing from the wall. Nail at all four corners using nails that penetrate through the roof sheathing.

Step 2: Butt the SmartVent[™] 36" section against the SmartVent[™] Tapered End Cap tightly and nail per SmartVent[™] directions.


Step 3: Continue installing the remaining SmartVent[™] over the roof deck sheathing and previously installed drip edge.

Step 4: Install 36" wide ice & water membrane only over the SmartVent[™] and SmartVent[™] Tapered End Cap tight against side wall and continuously across the roof. Keep 36" ice & water membrane flush to the SmartVent[™] lift edge which will cover the entire top surface of the vent. Install ice & water membrane a few inches up the wall when possible.

Step 5: Ensure the ice & water membrane is only over the vent and tight against the wall for eave edge installations.

Step 6: Install wall step flashing over ice & water membrane and up the wall. Allow a ½" to 1" eave edge overhang for shingles. Ensure step flashing is installed at each shingle course.

Step 7: Install starter course and shingles with a ½" to 1" overhang beyond the lift edge of the SmartVent[™]. Ensure step flashing is installed at each course with the proper coverage.










Step 6



Step 1


Steps 2 & 3

Steps 4 & 5

Step 7

Instructions for Creating Your Own Tapered End Cap

Cut 45° angle with razor knife starting from the tapered edge working toward the fabric exterior. Discard the cut-off piece (fig. 1-3). With another piece of SmartVent[™] make opposite cut and discard the cut-off piece (fig. 4).

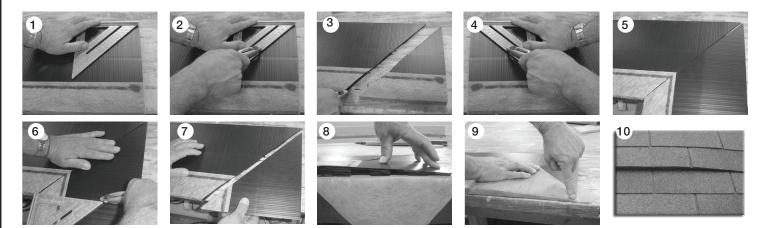

Install tight & cut flush with lift edge. Using a square & razor knife (fig. 5 & 6). Place end cap to the SmartVent[™] & place fabric half below (Fig 7). Nail SmartVent[™] end cap in place with fabric half showing (fig. 8). Take the fabric and wrap it over the vent & nail it tight. Install ice & water membrane & shingles (fig. 9). Finished Installation. Ensure shingle overhangs 1/2" past the lift edge (Fig. 10).

PAGE TWO



SmartVent[™] #80750 Mid-Roof, Off-Wall, & Off-Peak Installation Instructions

STEP 2: Make lines at the 6" and 7" marks as shown below. **STEP 1:** Shingle up to the area that requires SmartVent[™]. • At the location of the shingle course (where the SmartVent[™] is to Do not install any underlayment or shingles above the location be located) measure up from the bottom edge of that shingle of the SmartVent[™] prior to the completion of SmartVent[™] 6" to 7" before installing that course of shingle. installation. Strike chalk lines to mark • Cut or stop underlayment at top of shingle course where 1" slit the 1" cutout. Use a will be cut. circular saw to cut • Ensure there is a minimum plywood. Do Not Cut 1" clear rafter width air Into Rafters! space from soffit to ridge. See step 3 before cutting through the top of the previously installed shingle and plywood along the chalk lines. STEP 3: Creating the intake slot. STEP 4: Remove the plywood decking after the continuous cut and ensure the airflow is unobstructed from the cut • When cutting the 1" slit, stay 12" in from the roof edges, walls, slit to the ridge or off-ridge exhaust vent. valleys, hips, pipes or any other • Ensure insulation is not blocking obstruction. Use a circular saw. airflow. • Using the circular saw, use safety • Ensure the full roll width of when cutting and set blade ice shield installs on top of depth so you do NOT cut into SmartVent[™]. the rafters! • Shingles must have a 1/2" overhang beyond the lifted edge of the vent. Nail Line 🕈 STEP 5: Nail the SmartVent[™] so that it is even with the **STEP 6:** Apply a roll of ice and water membrane on top of the SmartVent[™] and directly to the plywood above the bottom of the edge where the next course of shingle would be installed. SmartVent[™]. • If starting at the rake edge, install the fabric method by wrapping • If underlayment was already installed, tuck the ice and water membrane under the higher course of underlayment so there the fabric around the end of the vent (see SmartVent[™] eave vent directions steps 2, 3 & 4). If starting or ending within is a 3" overlap. the shingled area follow the SmartVent[™] Tapered End Cap • Ensure the ice and water installation page. membrane adheres to the • Starting 2" from each end of the SmartVent[™] piece, nail the SmartVent[™] and wood SmartVent[™] to the roof decking at the top edge with 4 nails decking and not the existing spaced evenly See Step 4 image. underlayment. Nail the bottom with four nails matching the spacing of the top row of nails at the nail line in the fabric. STEP 7: Install a starter course of shingle overhanging the STEP 8: Install the shingles over the starter course and SmartVent[™] edge by at least 1/2" and not more than 3/4". continue to shingle the roof normally. Note: SmartVent[™] mid-roof valley installation is required to be terminated and the use of a SmartVent[™] Tapered End Cap is to be used Do Not install shingles even to start and stop the with the vent, they must SmartVent™ on each side of the overhang. valley and when stopping short of the rake edges.



SmartVent[™] #80750 Roof-to-Wall or Shed Roof Installation Instructions


STEP 1: Shingle up to the area that requires the SmartVent[™] Roof-to-Wall vent application. Ensure there is proper continuous intake ventilation below proposed Roof-to-Wall ventilation.

STEP 2: Measure 3" out from the wall where the SmartVent[™] will bend up on the wall. Strike a chalk line at the 3" mark along the roof decking and cut out the roof decking (leave about 12" of decking uncut at each roof edge or before any wall, valley, hip, etc.). Ensure the cuts do not penetrate the roof rafters. Remove roof decking and ensure there is at least 1" of clear space between roof decking and any header board. This allows the air to escape. Complete the shingling to the slit cutout but ensure the shingles do not cover the cutout opening.

STEP 3: Install the SmartVent[™] end fabric at the roof edge hanging half, 5.25", beyond the roof edge and nailing fabric to roof deck (Note: The fabric can be folded to 6" X 10.5" to fit properly before nailing to cover the SmartVent™ roof edge. Fabric is not required on the section of SmartVent[™] attached to the wall, only the roof area). Use SmartVent[™] Tapered End Cap (IPS Part #80751) when wall vent is short from gable/rake edge. You may need to cut end cap to fit around the corner post. Next, install the SmartVent[™] by bending at the routed hinge and having the smooth side of the vent facing you. The built-up side will be down against the roof and wall and nailed at 2" in from ends (along the nail line in the fabric) and two nails evenly spaced between them. Nail the vent to the wall with matching spacing of nails. Ensure the vent is nailed at each edge 2" in. Nail length should penetrate through roof decking. Ensure the SmartVent[™] is placed tight against the roof and wall before securing with nails. Butt each piece tightly against the previous one. Continue to the opposing roof end.

STEP 4: Complete the SmartVent[™] end of the run by installing the end fabric at the shingle edge by folding one side over to make a 6" X 10.5" piece of fabric. Nail half on the roof (5.25") and leave half (5.25") hanging over the roof edge and placing the last cut piece of SmartVent[™] over the fabric but even with shingle gable edge. Wrap the remaining fabric tightly over the top of the SmartVent[™] even with the shingle end and nail. If stopping short of the shingle edge/rake edge, use the SmartVent[™] Tapered End Cap to start or terminate the vent run.

STEP 5: It is recommended to install ice and water membrane on top of the SmartVent[™] extending up the wall about 12" to ensure a weather tight seal, lapping under any house wrap so water can drain over the ice & water membrane. Next, shingle above the SmartVent[™] to the wall, overhanging the top shingle past the SmartVent[™] lifted edge by ½" and then install a flashing that covers at least 4" of the shingle and extends up the wall at least 4". Metal or vinyl flashing can be used. Ensure all openings in the wall above the roof-to-wall area are completely sealed such as lower and upper window corners and flashing details around windows, doors and trim boards. When metal flashing is used instead of shingles over the SmartVent[™], ensure the metal flashing overhangs the SmartVent[™] lift end by ½" and up the wall 4" minimum. Secure flashing to wall. SmartVent[™] is rated at 9 NFVA.

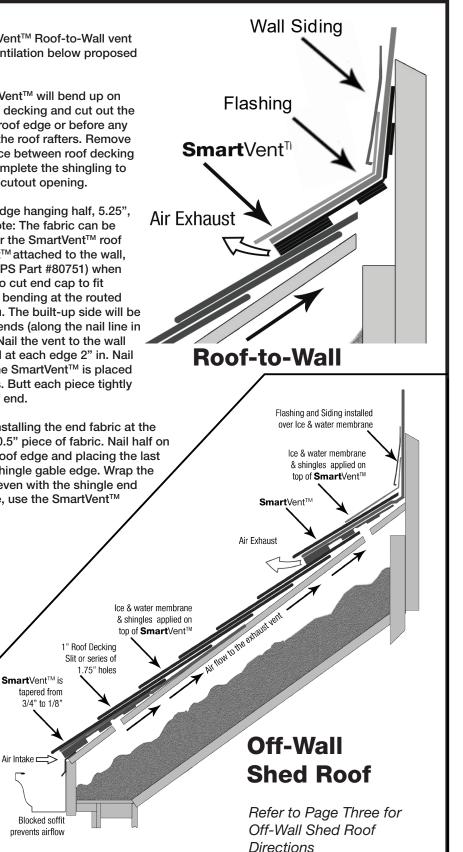

Air Intake ı



Decide if you will miter (Figure 1) or vent the valley (Figure 2). If miter skip to Step 4 and see Figure 1.


STEP 1: First strike a chalk line at 6 ½" away from the centerline of the valley on each side of the roof deck.

STEP 2: Drill 1¾" holes at 3" on center along the chalk lines (or 15" wafer cuts at 6" intervals at 6" to 7" from the centerline). Do not drill or cut through any rafters. Install a 12" x 12" square piece of ice and water membrane at the bottom edge of the plywood roof deck where it meets the metal drip edge and fascia board before installing the lower SmartVent[™] piece. This membrane will cover the metal drip edge mitered joint completely.

STEP 3: Install one SmartVent[™] with the smooth side up and the thick edge toward the valley. Install a second SmartVent on the opposing side matching the thick edges together at the centerline. Install with eight nails, four along the upper edge and four along the lower edge of each SmartVent[™] piece. Angle cut the SmartVent[™] as shown in Figure 2.

STEP 4: Make sure you install a 12" x 12" square piece of ice and water membrane at the bottom edge of the plywood roof deck where it meets the metal drip edge and fascia board before installing the lower SmartVent[™] piece. This membrane will cover the metal drip edge mitered joint completely. Cut and/or miter the SmartVent with a razor knife at the bottom and the top of the valley to conform to the valley angle. Wrap the enclosed fabric on any exposed edges of SmartVent when installing.

STEP 5: Install your choice of valley protective membrane over the top of the SmartVent[™] after the vent is installed. Continue your roof shingling per manufacturer's instructions.

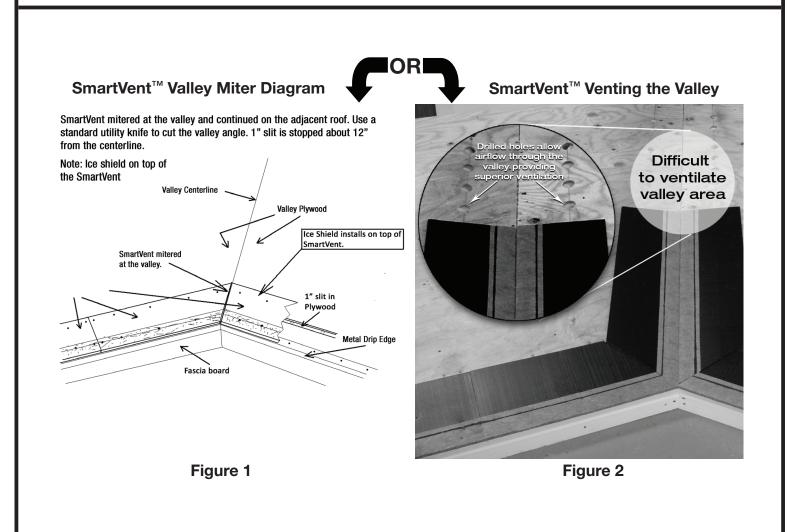



SmartVent[™] #80750 Dormer Peak Installation Instructions




Figure A

STEP 1: Prepare Roof Decking

The first step is to prepare the roof decking by cutting or leaving a 1" slit on both sides of the roof peak away from any 1½" ridge beam (a total width of 3 ½" is required with or without a ridge beam and that is the maximum width). Do not cut at least 12" in from the gable ends or other obstacles. This is most easily done when laying the roof decking by cutting the last piece of roof decking 1 ¾" short of the roof peak on both sides of the ridge (Figure A). NOTE: The proper amount of soffit ventilation is required to maximize your ridge vent effectiveness. Wider ridge beams above 1 ½" require special installation techniques. Contact IPS for more information.

STEP 2: Install Shingles & SmartVent[™] on Lift Side First Which is the Steeper Pitch Side at 4/12 or Greater. After roof shingles are installed on the lift side of the roof, begin at one end of the roof. A nailing area on SmartVent[™] is approximately 2" in from the edge of the product on either side with four nails per side equally spaced starting at the edge and ending at the opposite edge. Nail SmartVent[™] to the roof decking using 1 ½" - 2" roofing nails. Ensure nails penetrate all the way through the roof decking. Use at least four nails per side per piece. In the SmartVent[™] box are pieces of fabric (approx. 10 ½" square) that will be used to seal the gable ends. Wrap the fabric around the end of a piece of SmartVent[™]. When using the fabric, install the piece so that an equal amount of fabric is on top and on the bottom. Nail the fabric to the roof and bend it around the piece of SmartVent[™].



Position the SmartVent[™] piece over the ridge so that it is nearly centered over the ridge opening. Fold SmartVent[™] over the ridge and secure to the roof decking using 1 ½" roofing nails minimum (ensure nail goes through the roof decking). Ensure you start flush with the gable edge & wrap the end fabric over the SmartVent[™]. Attach the next piece of SmartVent[™] by butting the end of the piece up tightly against the end of the previously installed piece. Continue butting 3' pieces of SmartVent[™] until the end of the roof. Cut the final piece to fit flush with gable end and repeat step 2 to seal the end & install gable end fabric. Hang cap shingles 1/2" to 3/4" past all edges of SmartVent[™].

STEP 3: Install Shingles/Rubber Roof on No-Lift Side

After the SmartVent[™] is installed, complete the no-lift side of the roof by extending the underlayment, shingles or rubber roof over the SmartVent[™] by at least 9" or over the peak & flush with the lift side. Install cap shingles over SmartVent[™] as you normally would. Ensure that about ½" of the shingle cap extends past the lift edge. SmartVent[™] is strong enough to stand up to nail guns during shingle installation. Use extra long roof nails (1 ½" to 2" nails) for securing the shingles. Shingle cap nails should penetrate through vent and roof deck. (Figure B)

NOTE: Low slope roofs less than 4/12 must have the No-Lift side nailed to the low slope side. On the No-Lift side rubber roof or shingles extend over the SmartVent[™] sealing the No-Lift edge from weather conditions. The No-Lift edge is nailed under the underlayment & rubber or shingles install over the No-Lift side to the lift side & nailed on the lift side. Install cap shingles as you normally do.

NOTES:

- SmartVent[™] can be installed under virtually any shingle course when proper installation techniques are used.
- SmartVent[™] is nail gunnable.
- SmartVent[™] should be installed on shingled roofs with a minimum 4/12 pitch. There is no maximum slope installation.
- Use of ridge or off-ridge exhaust vents is required.
- Use SmartVent[™] Tapered End Caps when terminating SmartVent[™] within the shingled area of the roof.

US Patent #6,447,392





SmartVent™ Tapered End Cap IPS item #80751

500 Distribution Parkway Collierville, TN 38017 • 800-888-8312 • FAX: 901-853-5008 • IPSROOFINGPRODUCTS.COM

PAGE SIX