SOFFFICTORIARD BY DOI Stop guitter leaks BEFORE they occur!

Ice/Water Shield

Installs from _____ deck to Fascia

This arrow is indicating the source of almost every gutter leak issue. The easy installation of SoffitGuard can prevent this from happening.

STOP GUTTER LEARS

Install with standard roofing nails

STOP GUTTER LEAK

THEY OCCUT

SoffitGuard is the most effective product on the market in providing preventative protection of gutter leakage.

Easy installation adds little to no added time on the job site and prevents call backs for repairs.


800-622-4455 • WWW.DCIPRODUCTS.COM

Fascia Board



Directions for SoffitGuard

- 1- Ensure no shingles are on the roof before the SoffitGuard is to be installed. Apply the Product to the wood roof deck and the fascia board (half and half). The gutter will be attached <u>TO THE FACE</u> of the SoffitGuard, so the Product will be behind the gutter when complete. The route is installed against the joint of the roof/fascia. Use a utility knife (razor knife) to cut product.
- 2- Fold SoffitGuard by hand so the route is inside the bending area. Make it a full 360 degree fold with the solid plastic on the outer surface of the bend and the routed groove on the inside of the bend. Shingle roof after installation.

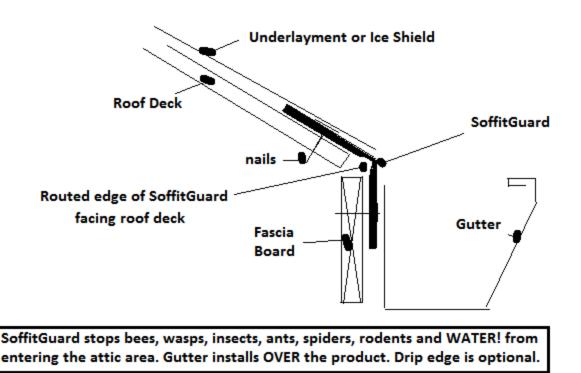

- 3- Allow the SoffitGuard to relax and form a natural bend that is nearly a 90 degree right angle. It will form to the roof/fascia angle once placed on the roof and fascia evenly. Use minimum 1-1/4" roofing nails to secure to roof/fascia.
- 4- Starting flush with the side rake fascia, place SoffitGuard even with outside surface of rake fascia. Nail each flange every 6 inches starting 1" from each edge. Butt all pieces tightly together until reaching the opposite roof edge. Underlayment covers the roof flange completely. Gutter covers fascia flange.

Manufactured by: www.DCIProducts.com - Questions? Call 800-622-4455