

SmartBaffle by DCI

Installation instructions of Smartbaffle 16 & SmartBaffle 24 (SmartBaffle is available for 16" or 24" rafter spaces, respectively)

It is important to follow each step within these instructions for proper installation of the SmartBaffle product. If you need assistance with this product installation, please call DCI Products Monday through Friday 8am- 5 pm est.

Our toll free number is 800-622-4455 or contact us via email info@dciproducts.com





1- To install the SmartBaffle simply bend up the 2" side flanges with the routed flange grooves facing the insulation. Insert the flanges into the rafter space ensuring that they rest against or near the underside of the roof decking. The flanges will automatically leave a 2" air space between the roof deck and the lower panel of the SmartBaffle. Slide the SmartBaffle down towards the fascia board to about 3" short of the inner side of the fascia board. This allows room for air flow from under the soffit. SmartBaffle is also designed to be used with SmartVent intake ventilation (www.dciproducts.com). Use a standard Utility knife to custom cut the SmartBaffle to fit rafters, ridges and wall plates to seal for wind. The side flanges also work as nailing tabs from the rooftop or attic area.

2- The SmartBaffle (Fig. 1) installs using a small 8d nail placed proximate to the middle of the SmartBaffle on each side below the baffle, ensuring the flanges are tight to the roof deck. Install as many SmartBaffles as needed to create the rafter air chute ensuring that a clear, continuous air channel is present between the soffit intake air and the roof's exhaust air or ridge vent and the underside of the roof deck. For multiple baffle installations in one rafter bay simply abut each baffle together (recommended). Other choices include: a) overlap each baffle by 1" or b) allow 1/4" space between each baffle. NOTE: When using spray foam insulation, ALL SmartBaffles need to abut each other tightly in the same bay or overlap 1" to ensure the foam does not penetrate the air chute.

3- To create a smaller size SmartBaffle for narrow rafter spaces, simply cut the one long side, about four inches (4") wider than the width of the rafter space. Next, use a utility knife to cut "half way through" a mark made 2" in from the SmartBaffle cut off edge. This will create a flange that bends up towards the roof deck. You may practice this cut on a scrap piece of baffle material prior to working on the installed SmartBaffle to become familiar with the 1/2 cut. Another way is discussed in step #4.

4- Things to remember: ensure insulation is not inside the 2" air chute created between the roof deck and the SmartBaffle. Install SmartBaffle in all rafter spaces that have soffit intake air flow that may be blocked by insulation. Use a utility knife to make cuts. Larger size spaces can follow the next directions in step #5. Tip: To create a smaller baffle, cut the SmartBaffle long ways 1/2" less than the width of the rafter space (allowing for the flanges bending up). Once separated, overlap at the cut edges creating the size required including the flange allowances (Flange allowance is 4"). Screw the overlapped long edges together using eight 1" long screws (max.) pointed towards the roof deck for safety purposes. Using this method the space between the routes in the SmartBaffle would be the space between the narrow rafter space.


5- To create a larger SmartBaffle (Fig. 2) simply screw two flat SmartBaffles together with maximum length 1" screws (eight screws with screw points toward the roof deck when installed) ensuring the width is 4" wider than the rafter space (this allows for the 2" flanges). Then install per the above directions. Below is a sketch of the SmartBaffle installation inside a rafter space.

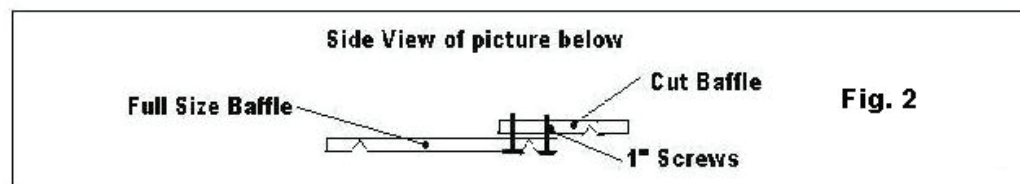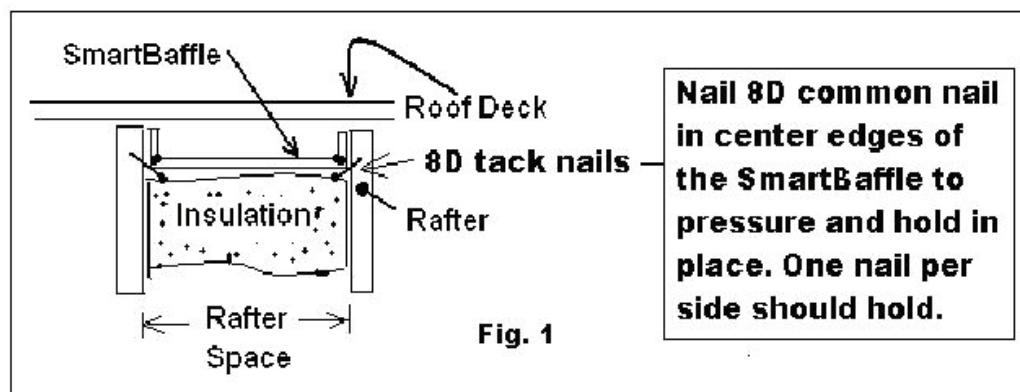

SmartBaffle by DCI

Installation instructions of Smartbaffle 16 & SmartBaffle 24
(SmartBaffle is available for 16" or 24" rafter spaces, respectively)


DIRECTIONS FOR CUTTING A SMALLER SMARTBAFFLE

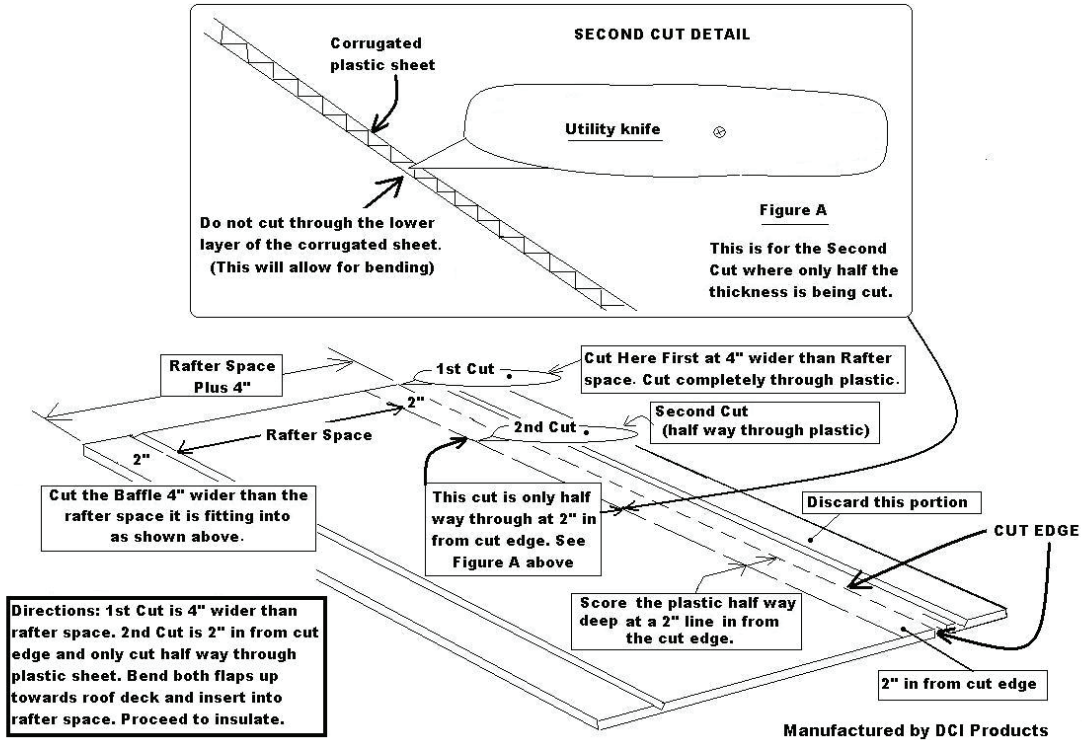

DIRECTIONS FOR MAKING A WIDER SMARTBAFFLE

Note: SmartBaffle is available for 16" rafters (SmartBaffle 16) and for 24" rafters (SmartBaffle 24)

Manufactured by DCI Products

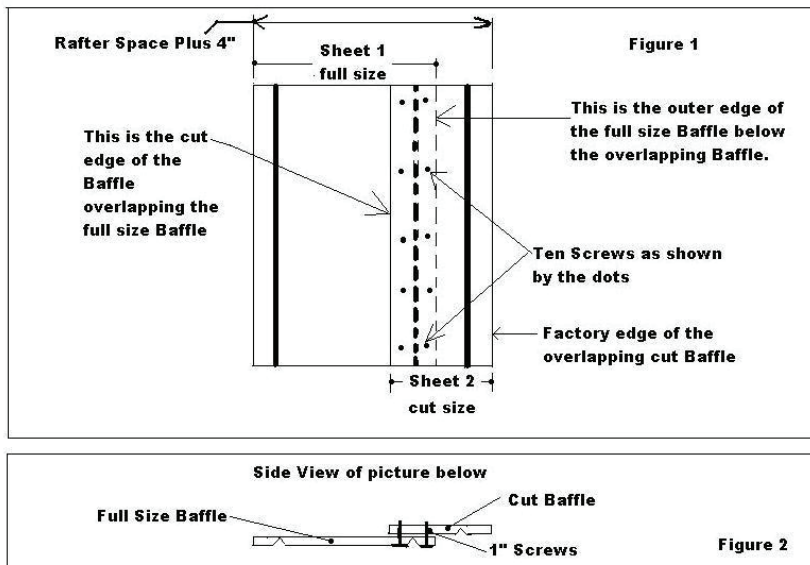

DIRECTIONS TO MAKE A WIDER BAFFLE:

Fig. 1- overlap a portion (half sheet length wise) on top of a full sheet of SmartBaffle. Attach 10 screws 1" long connecting the sheets together. The overall SmartBaffle width size should be 4" wider than the rafter space it will be used in. Once attached bend up the outer 2" flaps so they form a 90 degree bend. Insert into rafter space. Continue with as many as needed ensuring the space distance is the same.

Fig. 2- a cross section of Fig. 1 showing the overlay of the cut piece above the full SmartBaffle and screws for attachment.